


CRP 675: Chiwawa Loop Road, Phase III

Chiwawa Loop Road (MP 3.13 to MP 4.57)

Last Updated: June 6, 2017

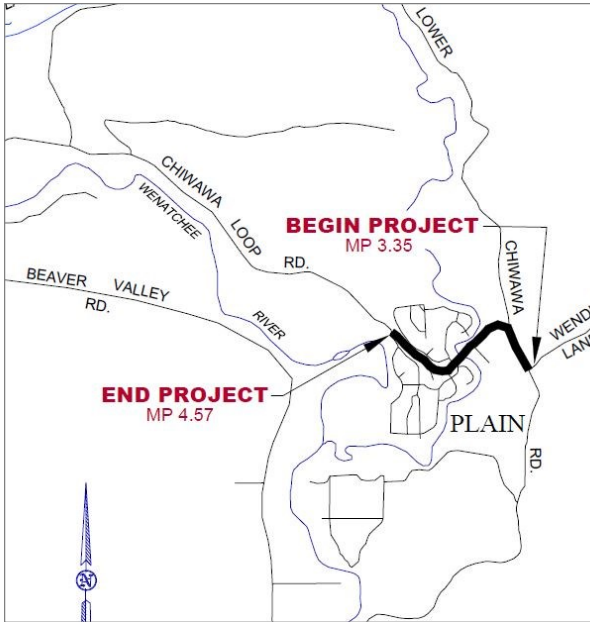

Project Vicinity Map

Project Number: County Road Project 675

Project Length: 1.44 miles


Basis for Project: Roadway Preservation

Construction: June 5 to early October 2017

Project Description: The primary purpose of this project is to reconstruct 1.44 miles along Chiwawa Loop Road (93300) from Wending Lane to Sumac Lane. The project will address a deteriorating pavement and roadway base by upgrading the structural integrity, which can be maintained at a low life cycle cost. In addition to a new roadway base and surfacing, this project will also widen the road from 22 feet to 30 feet, examine the need for drainage, replacement/addition of guardrail, construct fish passable drainage structure, improve roadway geometrics, and make improvements to the roadside and clear zone.

Status: Project is under construction. Bid was awarded to Reece Construction Company.

Traffic Impacts: Travelers on Chiwawa Loop Road can expect to encounter one-lane flagger or pilot car controlled traffic through work zones with delays up to 20 minutes during summer 2017. A five-day road closure in the project area is scheduled for July 24-28. Detour is via Beaver Valley Road and Highway 207.

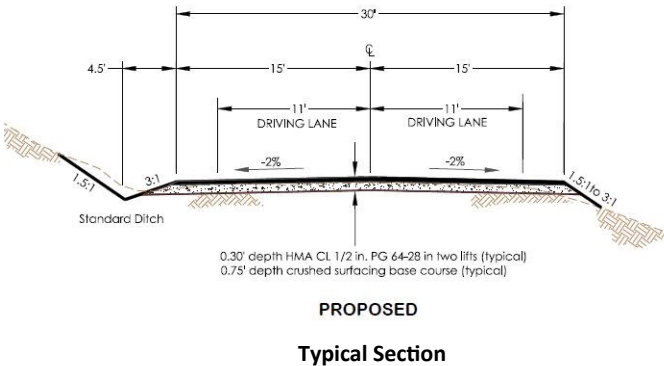

Funding Sources:

Rural Arterial Program	\$2,738,700
Western Federal Lands	\$496,300
County Road Fund	\$100,000
TOTAL:	\$3,335,000



(Left) Condition of Chiwawa Loop Road.



(Left) Condition of Chiwawa Loop Road.