




CRP 715: Yodelin Creek Culvert Replacement Project

Stevens Road off US 2 (at milepost 0.04)

Last Updated: May 4, 2017

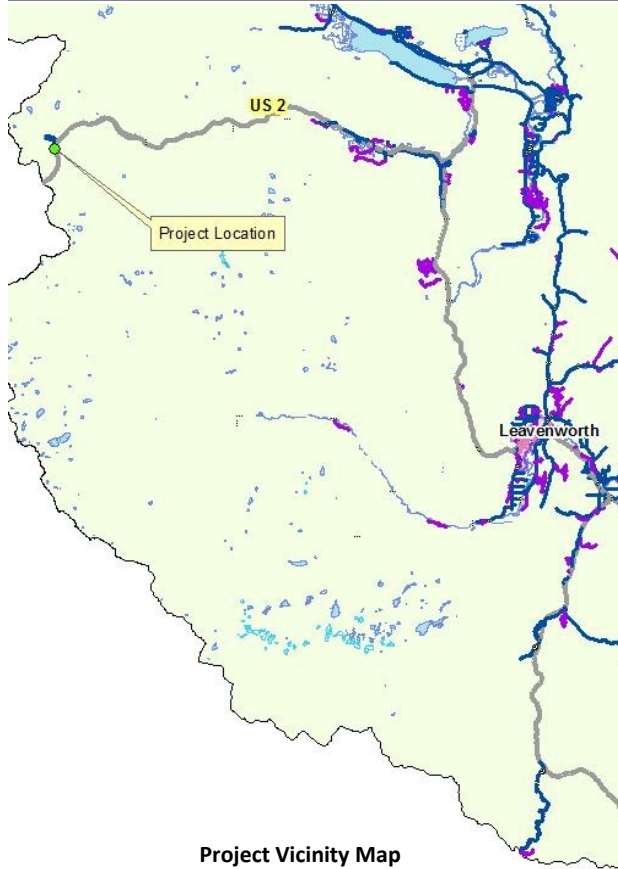

Project Number: County Road Project 715

Project Length: MP 0.02 to MP 0.06

Basis for Project: Culvert crossing replaced with bridge

Construction: Summer 2018

Project Description: The project will replace the existing multi-culverts crossing at Stevens Road (38630), located off US 2 near the summit, with a single-span bridge. The crossing was damaged during a November 2015 flood event and temporary repairs were made. The project will replace two existing 36-inch diameter culverts with a single-span bridge over Stevens Creek. The channel will require minor modifications to profile grade to be compliant with WAC fish passage requirements and may require a minor channel alignment change to accommodate a bridge. Road is temporarily open with one lane only.

Status: HW Lochner Inc. was hired in November 2016 to do the project design. Design is 30% complete.

Traffic Impacts: During construction the road may at times be closed to through traffic.

Funding Sources:

County Road Fund	\$113,750
State Funds	\$113,750
FEMA Funds	\$682,500
TOTAL:	\$910,000



(Right) Temporary repairs to crossing included the installation of two culverts and road repairs.

(Above) Washout of culverts from 2015 flood event.



(Left) Culverts destroyed by debris flow from flood event.

