




CRP 711: School Street Mid-Block Crossing

School Street MP 0.72 to MP 0.74

Last Update: May 4, 2017

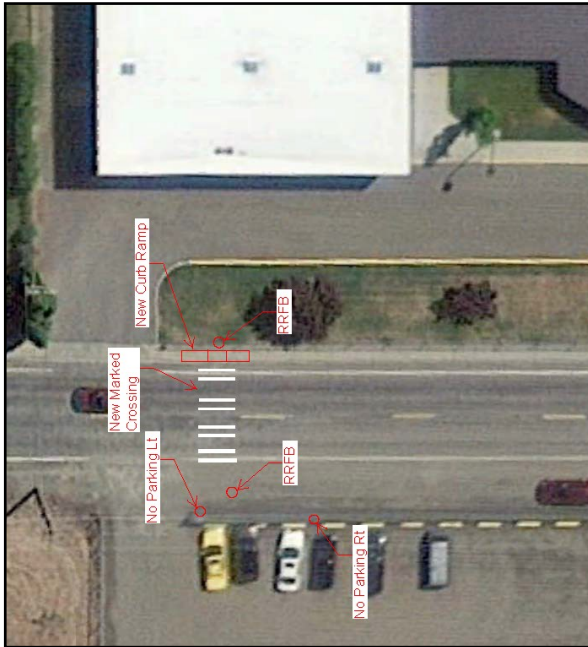

Project Number: County Road Project 711

Project Length: 0.02

Basis for Project: Pedestrian/School Safety

Construction: August 2017

Project Description: Project will construct a marked pedestrian crossing across School Street, with pedestrian-activated, rectangular rapid-flashing beacons (RRFB) and school crossing signs between the Sunnyslope Elementary School and the school parking lot.

Status: Preliminary engineering is underway. Construction, which should take about 10 days, is expected to begin in August and wrap up prior to the beginning of the school year.

Traffic Impacts: During construction, travelers should expect flagger-controlled traffic with minimal delays.

Funding Sources:

County Road Fund	\$ 5,300
STBG (Federal)	\$34,200

TOTAL: \$39,500



The project will construct a new, safer pedestrian crossing between the school and the school parking lot, an area actively used by families and staff.