


CRP 702 Wenatchee Heights Road Improvement

Wenatchee Heights Road (MP 0.00 to MP 1.32)

Last Updated: Feb. 20, 2020

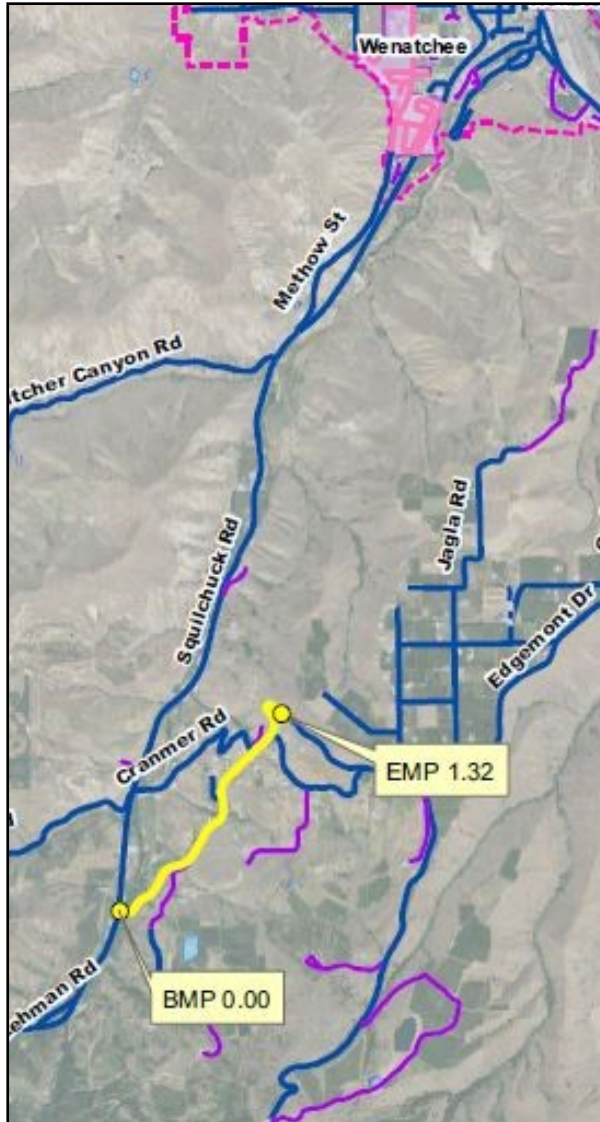

Vicinity Map

Project Number: County Road Project 702

Project Length: 1.32 miles

Basis for Project: Road rehabilitation

Construction: Summer 2020

Project Description: The primary purpose of the project is to rehabilitate the roadway and maintain it at the least possible lifecycle cost. Rehabilitation will be done using a technique called full-depth reclamation, or FDR. The planned work also consists of an HMA overlay to prevent further deterioration of the existing roadway, which falls below the level of minimal standards (42 to 70 rating). The project also will improve the pavement structure, replace deficient guardrail, improve drainage and upgrade the existing shoulders to 3 feet.

Status: Design is complete. Project goes to bid February 2020. Construction to start August 2020.

Travel Impact: Construction will be in summer 2020. Preliminary construction is scheduled to take 60 working days. During daylight hours, expect one-lane, flagger-controlled traffic with some minor delays.

Funding Sources:

Rural Arterial Program	\$ 2,200,000
County Road Funds	\$250,000

Current Funding Total: \$ 2,450,000



(Left: pictures of deteriorating surface and crumbling shoulder with inadequate drainage.)